



**GALGO** ®

== FLOOR DECOR SOLUTIONS ==

**5mm • PREMIUM RIGID CORE VINYL (SPC) FLOORING**



## TECHNICAL DETAILS

| Item                      |             | Unit | Test Methods                         | Spec   | GLATT FLOOR SPC  |
|---------------------------|-------------|------|--------------------------------------|--|--|
| Thickness                 |             | mm   | ASTM F 386                           | ±0.005"(0.13mm)  | ±0.005"(0.13mm)  |
| Size                      | Width       | mm   | ASTM F 2055                          | 184.15± 0.23   | 177.8± 0.23  |
|                           | Length      | mm   |                                      | 1220± 1.58   | 1219.2± 1.58   |
| Squareness                |             | mm   | ASTM F 2055                          | Max. 0.01"(0.254mm)  | ≤0.2%  |
| Gloss level               |             | -    | 60° Glass Meter                      |  | 5 - 8  |
| Size                      | Width       | %    | ASTM F 2199-09                       | ≤ 0.002"(0.165%)   | ≤0.1%  |
|                           | Length      | %    |                                      | ≤ 0.002"(0.165%)   | ≤0.1%  |
| Size                      | 23°C        | mm   |                                      |  | ≤0.5mm   |
|                           | -10°C x 2hr | mm   |                                      |  | ≤0.5mm   |
| Core Density              |             | -    |                                      |  | 1.95 ± 0.05  |
| Contraction (-10°C x 2hr) | Width       | %    | -10°C x 2hr                          |  | ≤0.2%  |
|                           | Length      | %    |                                      |  | ≤0.2%  |
| Expansion (50°C, 4hr)     | Width       | %    | 50°C x 4hr                           |  | ≤0.2%  |
|                           | Length      | %    |                                      |  | ≤0.2%  |
| Indentation               |             | %    | ASTM F 1914                          | ≤ 8%   | ≤ 5%   |
| Resistance to Chemicals   |             |      | ASTM F 925 (Resistance to Chemicals) | No more than slight change in surface dulling, surface attack, or staining | No more than slight change in surface dulling, surface attack, or staining |
| IIC                       |             |      | ASTM F 492-09                        | ≥ 50   | ≥ 52   |
| Static Load Limit         |             |      | ASTM F 970                           | 0.005"(0.13mm)   | 0.005"(0.13mm)   |

SCAN QR CODE  
FOR BROCHURE & SAMPLE DESIGNS



**4001 • NATURAL TEAK**



**4002 • HIMALAYAN PINE**



**4004 • HIMALAYAN PINE**



**4005 • NATURAL TEAK**

**4006 • HIMALAYAN PINE**







**4007 • NATURAL TEAK**

**4008 • HIMALAYAN PINE**


## MULTI-LAYER CONSTRUCTION

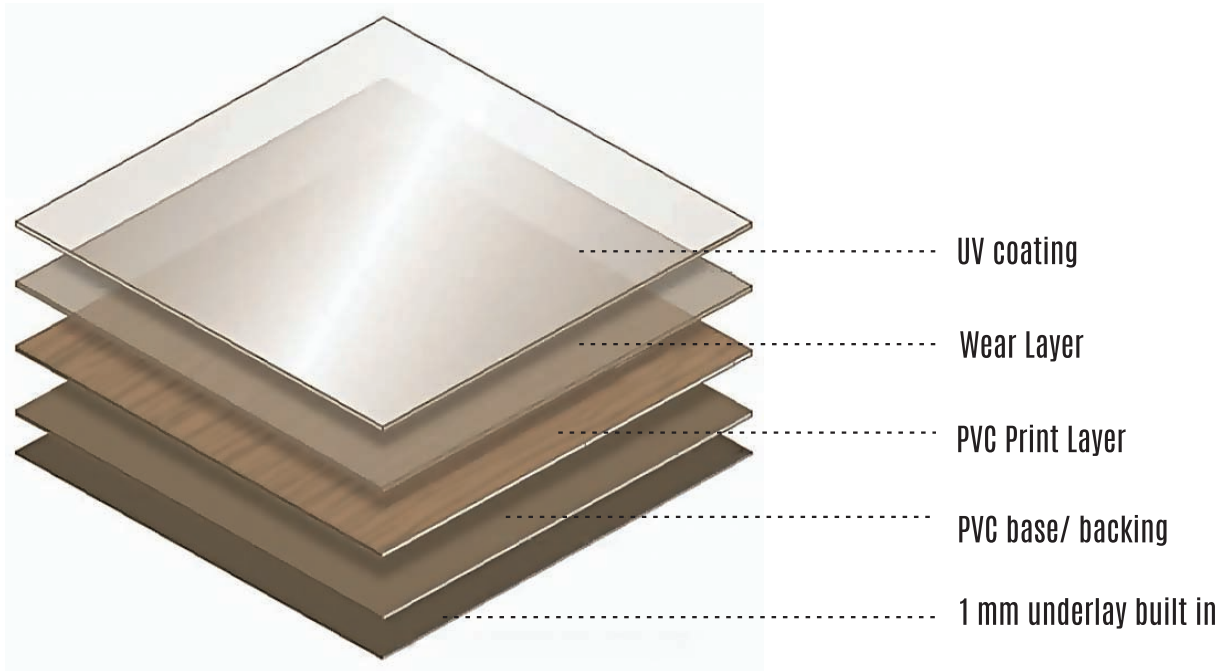

**TERMIT  
RESISTANT**



**ANTI  
BACTERIAL**



**ATTACHED  
BACKING  
FOR QUICK  
INSTALLATION**



**GREEN  
PRODUCT**



**WATER  
PROOF**



**SCRATCH  
RESISTANT**




**100%  
RECYCLABLE**



**10 YEARS  
FUNCTIONING  
FOR RESIDENCES**



**EASY TO  
CLEAN  
FLOOR**



**UNILIN CLICK**



**5 YEARS  
FUNCTIONING  
FOR COMMERCIAL AREAS**



## 5mm • PREMIUM RIGID CORE VINYL (SPC) FLOORING

Size : 1220mm (L) X 184.15mm (W) • 48" (L) X 7.25 (W)"

10 Pcs per box = 24.17 sqft. per box



**GALGO** 

FLOOR DECOR SOLUTIONS

S.P.C. • LAMINATE • VINYL FLOORINGS

an esteemed brand of  
**K2**  
**IMPEX**  
MUMBAI • NEW DELHI