




FLOOR DECOR SOLUTIONS

S.P.C. • LAMINATE • VINYL FLOORINGS

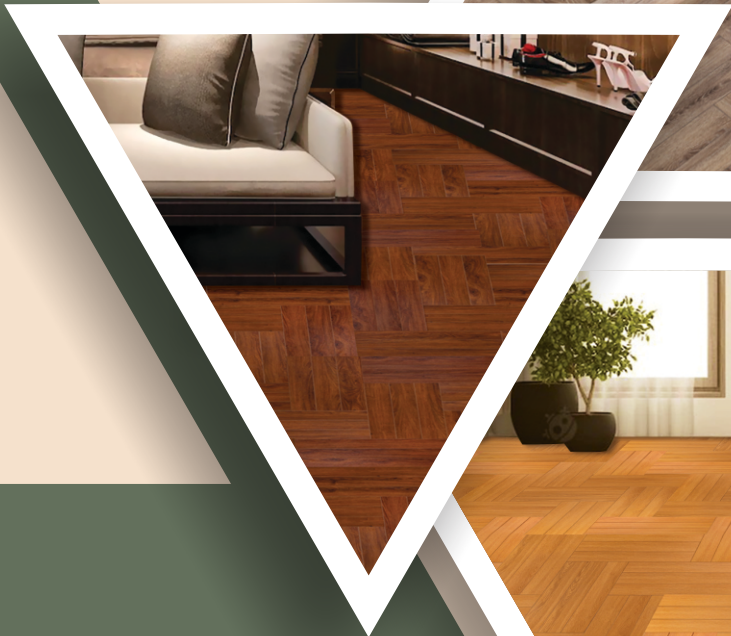

SERIES HERRINGBONE

LAMINATED WOODEN FLOORING

8.0 mm | AC 4 GRADE | SINGLE CLICK | V GROOVE









HB~101



HB~102







HB~102








HB~103

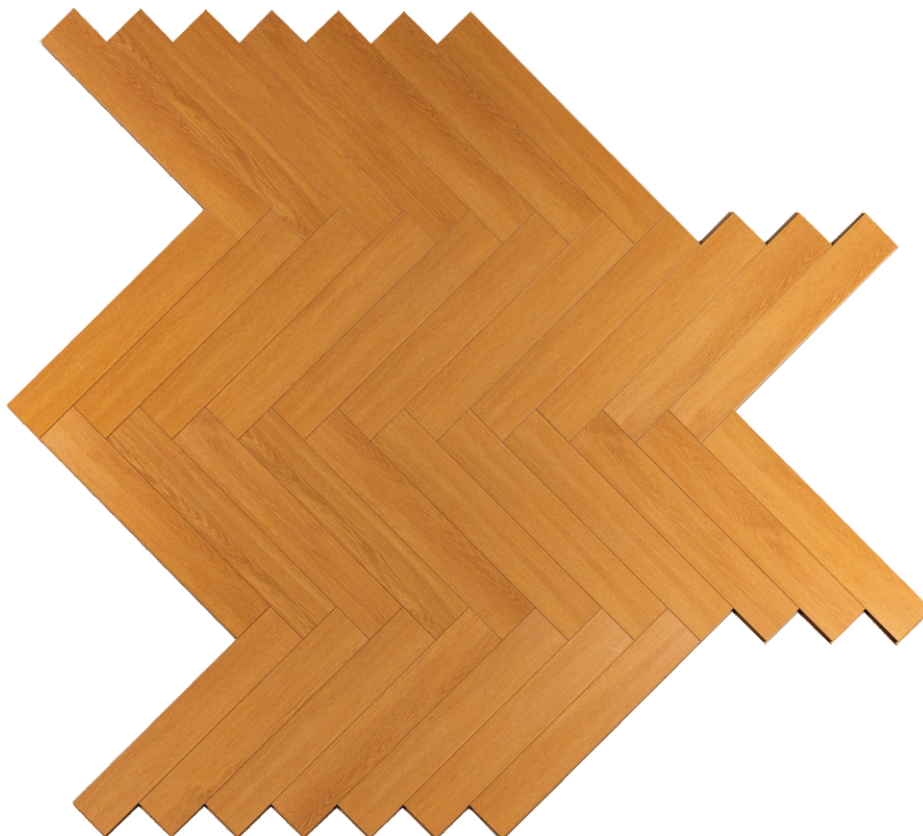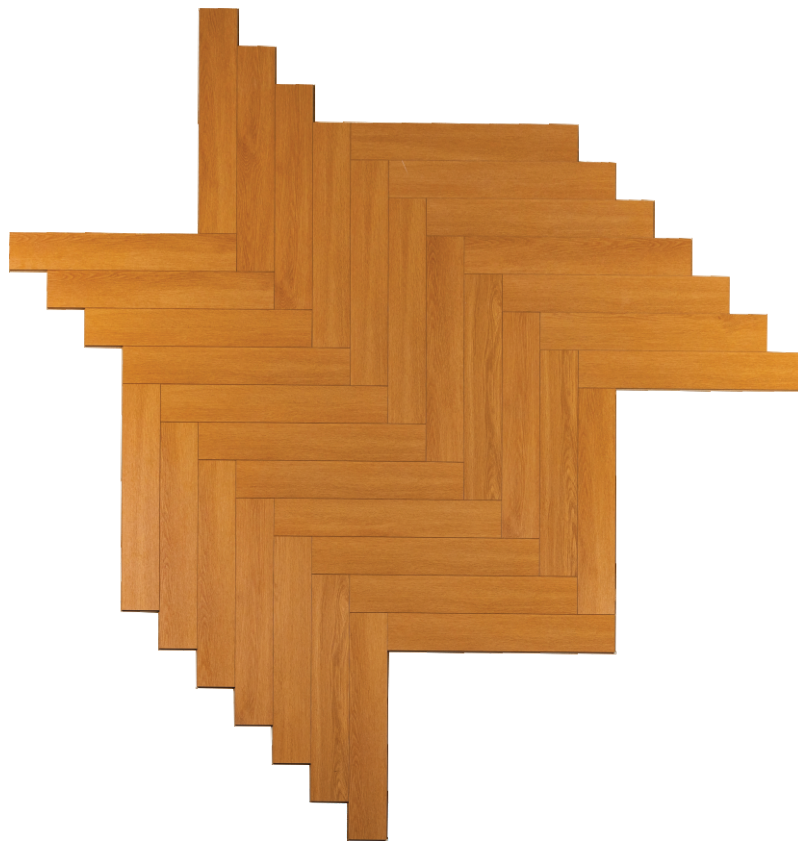

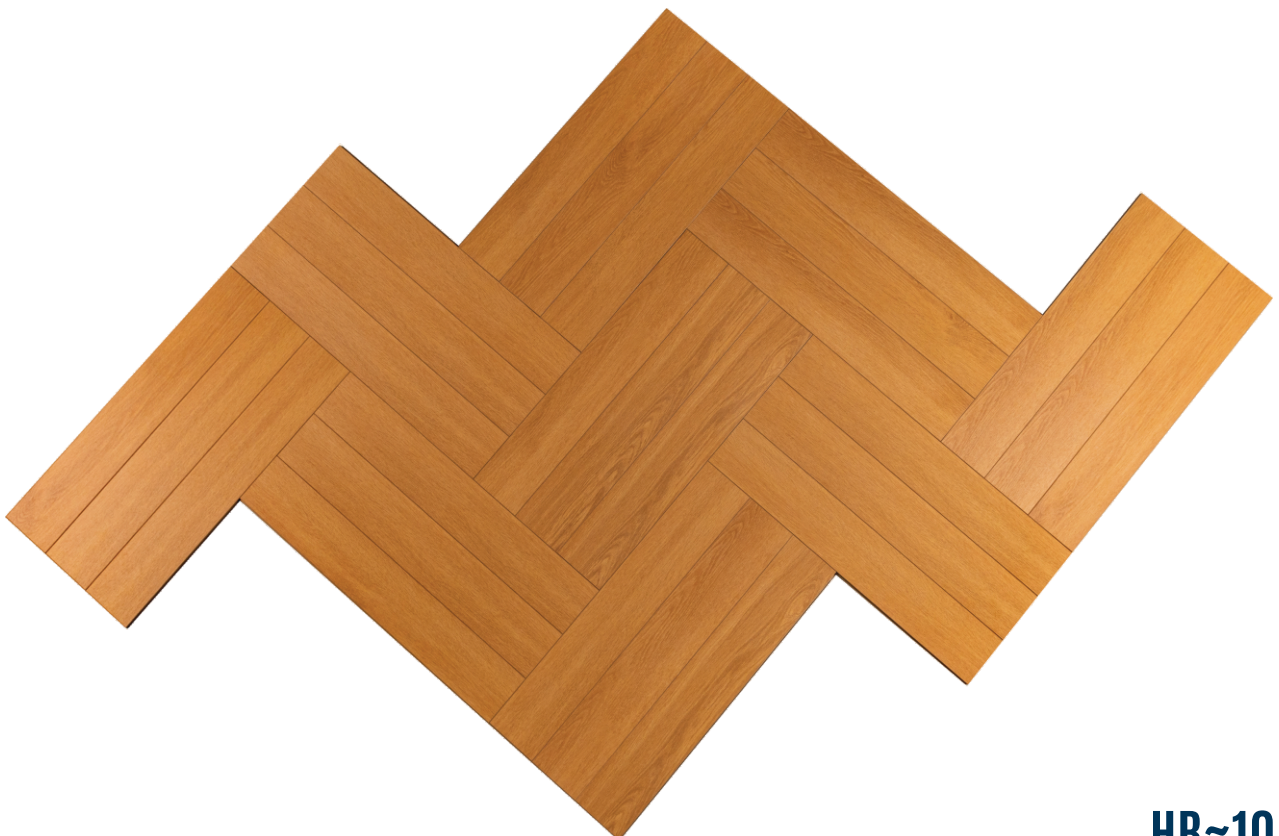




HB~104



HB~105

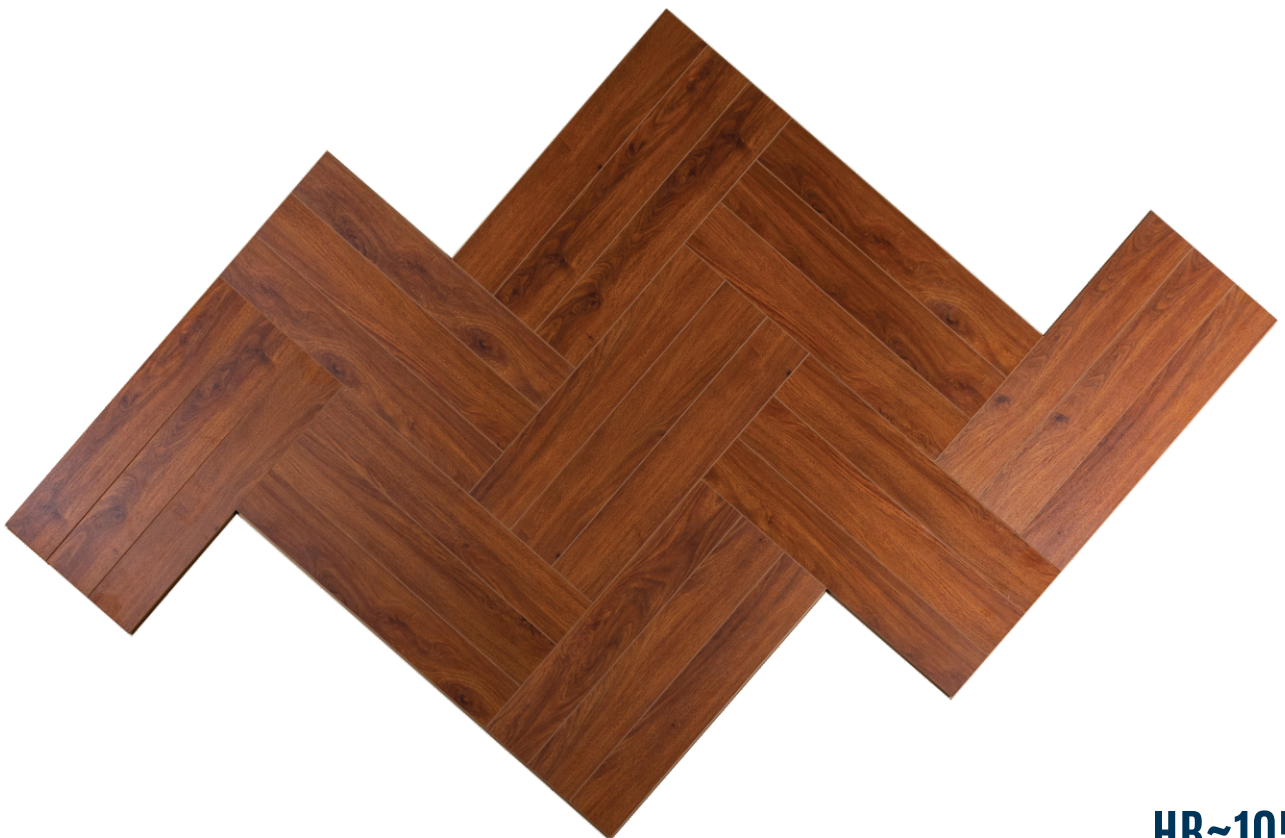

HB~105







HB~105














HB~106

Tests	Flooring Symbols	Results
Panel Dimension		606mm X 101mm x 8 mm
Service Category per Standard per	EN 685 EN 13329 	32
Abrasion Resistance	EN 13329 	AC 4
Impact Resistance	EN 13329 	IC 2
Formaldehyde emission of the substrate before coating	EN 120 DIBT-Richtiline 100 	E1
Formaldehyde emission	EN 717-1 EN 717-2	< 0,1 ppm < 3,5 mg/h m ²

All values are approximately values - fluctuations cannot be absolutely ruled out.

Moisture residue HDF		4-7 %
Thickness Swelling / Edge swelling		<18 ^o %
Thermal Conductivity		0.0780m ² K/W
Resistance to Cigarette Burns		grade 4
Light Fastness		not worse than 6 Blue wool scale not worse than 4 Blue wool scale
Lifting resistance		1 N/mm ²
Cross tensile Strength		> N/mm ²
Resistance to stains		groups 1-2 grade 5 groups 3 grade 4
Combustibility		Cfl, s1
sliding friction		0,3
Dimension variants after changes in relative humidity		length and width 0,9 mm
Straightness of the panels		0,30 mm /m
High difference between elements		maximum 0,15 mm average 0,10 mm
Squared elements		0,2 mm / panel width
Flatness of the element width		concave <= 0,4 mm convex <= 0,5 mm
System pattern matching widthwise Ship's planking matching widthwise		+/- 2 mm +/- 4 mm

SCAN QR CODE
FOR FULL PLANK DESIGNS



GALGO®

FLOOR DECOR SOLUTIONS

S.P.C. • LAMINATE • VINYL FLOORINGS

E-mail : info@k2impex.in • Web : www.k2impex.in

an eminent brand of
K2
IMPEX
MUMBAI • NEW DELHI